

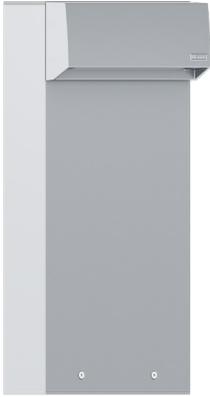


# UAB-10011

## Abacus 4 Single Head Bollard



11w LED - 783 Lumens  
IP65 · Suitable For Wet Locations  
IK09 · Impact Resistant (Vandal Resistant)  
Weight 20 lbs

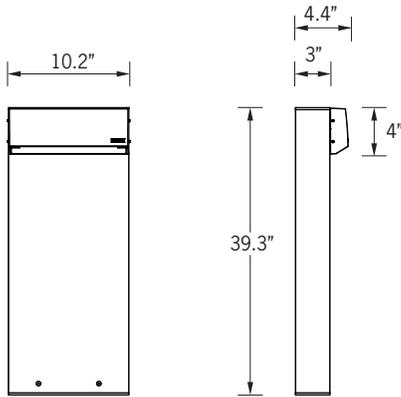

Mounting Detail

### Construction

#### Aluminum

Less than 0.1% copper content – Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength, clean detailed product lines and excellent heat dissipation.

#### Pre paint

8 step de-grease and phosphate process that includes deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

#### Memory Retentive -Silicon Gasket

Provided with special injection molded "fit for purpose" long life high temperature memory retentive silicon gaskets. Maintains the gaskets exact profile and seal over years of use and compression.

#### Thermal management

LM6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000 hours.

#### Surge Suppression

Standard 10kv surge suppressor provided with all fixtures.

#### BUG Rating

B1 - U2 - G1

#### Finishing

All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence.

#### Paint

UV Stabilized 4.9Mil thick powder coat paint and baked at 200° C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

#### MicroPRIM Finishes

MicroPRIM is Ligman's trade marked decorative powder coating technology that permanently infuses colors, patterns, or imagery directly into the surface of luminaires and poles while providing protections that standard powder coating does not offer.

MicroPRIM finishes include nature-inspired wood grains and stone aesthetics, material-inspired finishes such as brushed metal, concrete, and carbon fiber, Solid colors in Ligman standard colors, as well as any RAL or Pantone color, Decorative patterns, custom imagery and more.

#### Coating and Infusion Process

Metal components are pre-treated and powder coated with a proprietary polyurethane-based coating engineered for outdoor architectural use. Decorative patterns or imagery are then permanently infused into the cured powder coat through a heat-based process, creating a durable, integrated finish.

#### Performance and Validation

MicroPRIM finishes are suitable for indoor and outdoor applications and meet AAMA2605 architectural coating requirements. Performance is validated through laboratory and real-world testing to ASTM standards for UV exposure, adhesion, abrasion, impact, salt spray, chemical resistance, and graffiti resistance.

All MicroPRIM finishes are backed by Ligman's 10-year warranty.

#### Key Performance Attributes

- Anti-graffiti resistance
- UV and weather resistance
- Scratch and abrasion resistance
- Natatorium Rated for installation in corrosive environments

#### Hardware

Provided Hardware is Marine grade 316 Stainless steel.

#### Anti Seize Screw Holes

Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

#### Crystal Clear Low Iron Glass Lens

Provided with tempered, impact resistant crystal clear low iron glass ensuring no green glass tinge.

#### Optics & LED

Precise optic design provides exceptional light control and precise distribution of light.  
LED CRI > 80

#### Lumen - Maintenance Life

L80 /B10 at 50,000 hours (This means that at least 90% of the LED still achieve 80% of their original flux)

**Range-extending bollard version of our ground-breaking wall family. Beautiful and contemporary bollard mounted fixtures suitable for any location.**

A range of rectangular shaped bollards that complement the Abacus wall mounted luminaires providing downward light distributions. Ideally suited to illuminate walkways, as well as providing decorative light accents in parks and public spaces using high efficiency LEDs.

The Abacus is suitable for indoor and outdoor applications and provides a clean, visually appealing solution for small, unobtrusive bollard installations. This product range is available with surface mounted options with 3 different shapes (Square, Rectangular and Circular designs)

This product is provided with integral driver and special gasketing to ensure no water enters the luminaire. This product is provided with anchor bolts and laser cut steel bolt template to ensure accurate installation.

All Ligman fixtures can be manufactured using a special pre-treatment and coating process that ensures the fixture can be installed in natatoriums as well as environments with high concentrations of chlorine or salt and still maintain the 10 year warranty. For this natatorium rated process please specify "NAT" in options.

Offered in MicroPRIM Finishes — pricing differs from standard color paint options (contact factory for details)

### Additional Options (Consult Factory For Pricing)



RGBW or Static Color Laser Cut Lettering, Logos & Designs (LLVT Bollard shown for visual reference)

Ligman can provide custom logos and signage in the Abacus Bollard  
The images above show this feature in the Light Linear VT Bollard

# UAB-10011

## Abacus 4 Single Head Bollard

PROJECT		DATE	
---------	--	------	--

QUANTITY		TYPE		NOTE	
----------	--	------	--	------	--

ORDERING EXAMPLE || UAB - 10011 - 11w - W30 - 02 - 120/277v - Options

UAB-10011				
LAMP	LED COLOR	FINISH COLOR	VOLTAGE	

11w LED  
783 Lumens

W27 - 2700K  
W30 - 3000K  
W35 - 3500K  
W40 - 4000K

01 - BLACK RAL 9011  
02 - DARK GREY RAL 7043  
03 - WHITE RAL 9003  
04 - METALLIC SILVER RAL 9006  
05 - MATTE SILVER RAL 9006  
06 - LIGMAN BRONZE  
07 - CUSTOM RAL



120/277v


### ADDITIONAL OPTIONS

- NAT - Natatorium Rated
- HGT - Custom Bollard Height
- PH - Painted Hardware to Match Finish
- GFCI - GFCI Box  
[Standard location on back of bollard, consult factory for different location]



GFCI

### LASER CUT LETTERING

SC - Static Color (Choose Color e.g Red, Blue etc.)

WORDS FRONT	WORDS BACK
-------------	------------

CONSULT FACTORY FOR CUSTOM DESIGNS, LOGOS AND OTHER SPECIAL REQUIREMENTS  
FACTORY DRAWINGS WILL BE PROVIDED PRIOR TO PRODUCTION

MicroPRIM FINISHES	MicroPRIM FINISHES
SW01 - OAK FINISH	MP - MAPLE FINISH
SW02 - WALNUT FINISH	MHG - MAHOGANY FINISH
SW03- PINE FINISH	BH - BEECH FINISH
DF - DOUGLAS FIR FINISH	CN - CHESTNUT FINISH
CW - CHERRY WOOD FINISH	WMBL - WHITE MARBLE FINISH
NW - NATIONAL WALNUT FINISH	MBL - MARBLE FINISH
SU01 - CONCRETE FINISH	GRNT - GRANITE FINISH
SU02 - SOFTSCAPE FINISH	BGD - BRUSHED GOLD FINISH
SU03 - STONE FINISH	BBRZ - BRUSHED BRONZE FINISH
SU04 - CORTEN FINISH	CAMO - CAMOUFLAGE FINISH
MP01 - MicroPRIM RAL 9011 Black (Glossy)	CSM - Custom Image
MP02 - MicroPRIM RAL 7043 Dark Grey (Glossy)	
MP03 - MicroPRIM RAL 9003 White (Glossy)	
MP04 - MicroPRIM RAL 9006 Silver (Glossy)	
MP05 - MicroPRIM RAL 9006 Silver (Matte/Textured)	
MP06 - MicroPRIM Ligman Bronze (Glossy)	
MP07 - MicroPRIM Custom Color (Glossy)	


THERE IS AN ADDITIONAL COST FOR THESE FINISHES



Example: MicroPRIM Finish



# Abacus Product Family



Abacus 1

· UAB-30001-11w-7831m



Abacus 2

· UAB-30002-11w-7831m



Abacus 3

· UAB-30003-11w-7831m



Abacus 4

· UAB-10001-11w-7831m [19.6"]  
· UAB-10021-2x11w-2x7831m [19.6"]  
· UAB-10011-11w-7831m [39.3"]  
· UAB-10031-2x11w-2x7831m [39.3"]



Abacus 5

· UAB-10041-11w-7831m [19.6"]  
· UAB-10061-2x11w-2x7831m [19.6"]  
· UAB-10051-11w-7831m [39.3"]  
· UAB-10071-2x11w-2x7831m [39.3"]



Abacus 6

· UAB-30031-7w-3231m



Abacus 7

· UAB-30041-7w-3231m