


# INSTALLATION AND SERVICE MANUAL

**LIGMAN**  
NORTH AMERICA

For installation of Paragon Onground Uplight Cylindrical Dia 160mm. and Square 160mm. LEDs Model. UPR-50281-UPR-50285 and UPR-50301-UPR-50305.


## Product drawing (dimensions)

## SUITABLE FOR WET LOCATIONS

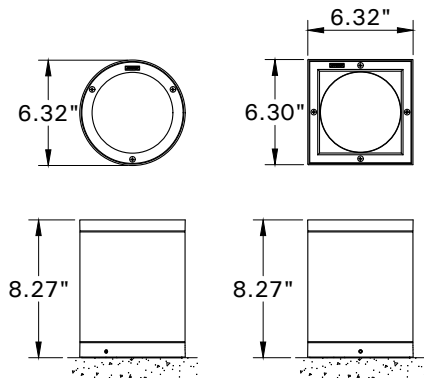

UPR-50281-UPR-50285

UPR-50301-UPR-50305

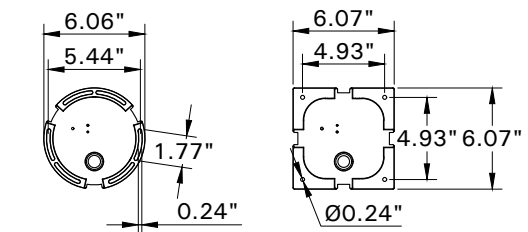


UPR-50281-UPR-50285


UPR-50301-UPR-50305

MOUNTING DETAIL


1

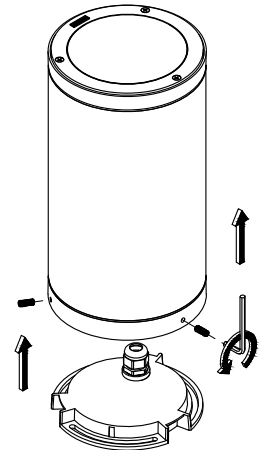


2




3

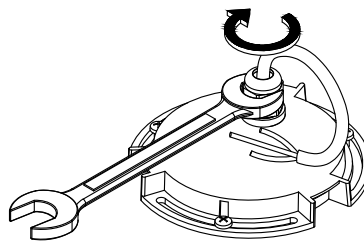

6

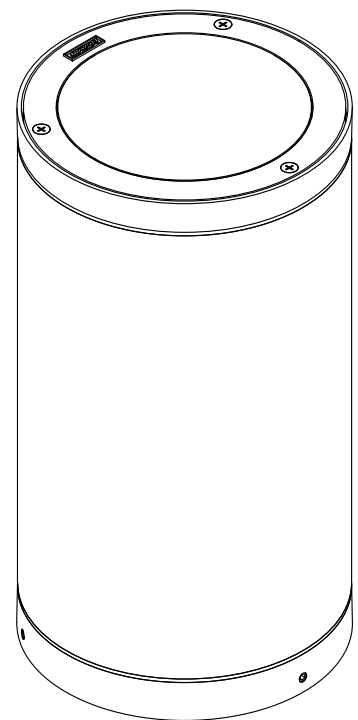


4

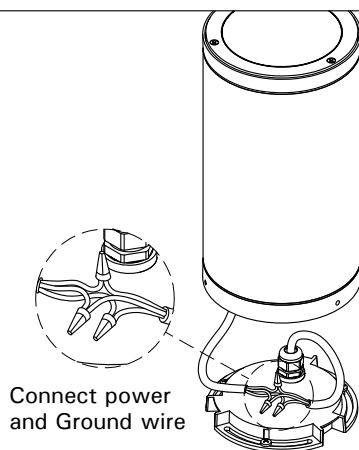

Connect power and Ground wire

5

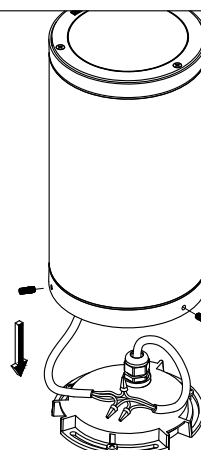

- LIGMAN standard products are supplied with the control gear 24Vdc.  
The control gear for other voltages and frequencies is available upon request, please consult us for more details.
- LIGMAN luminaires are designed to conform IEC 60598 2-18 standard.  
Technical amendments and modifications techniques reserved.

**Ligman Lighting USA**

7144 NE Progress Court, Hillsboro  
Oregon, 97124, USA  
Tel : 503 645 0500 | Fax : 503 645 8100